


DANTE EXTINGCTEURS
MARINE FIRE PROTECTION

EXTINGUISHERS 1-2-6-9 L
LITH-EX : LITHIUM BATTERY FIRES
Stored Pressure - Water with Vermiculite

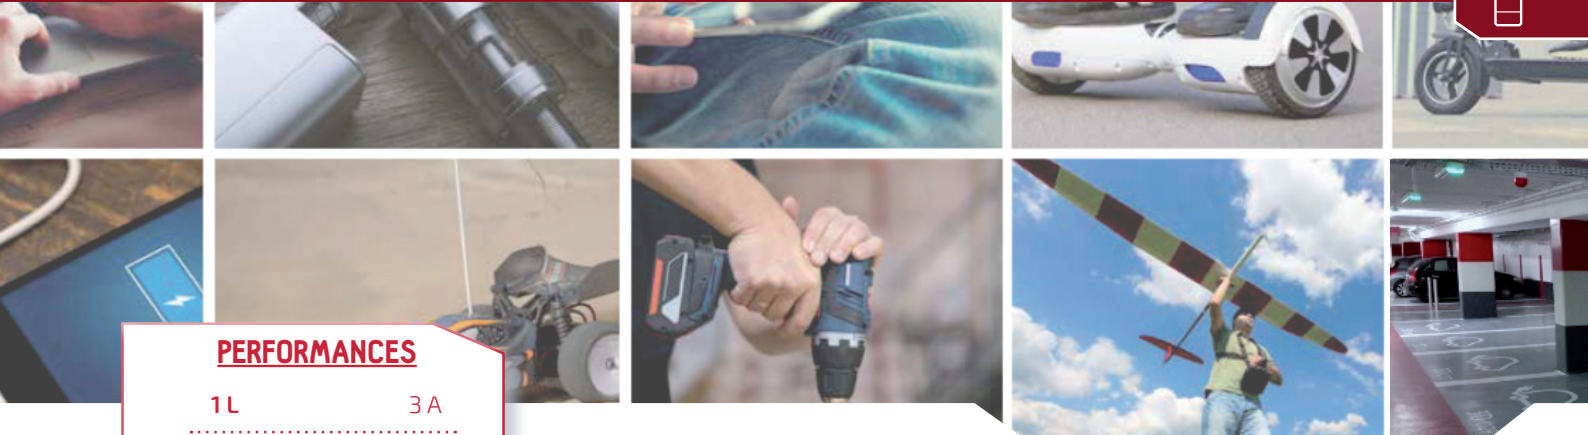

PERFORMANCES

1 L	3 A
2 L	5 A
6 L	13 A
9 L	13 A



Lith-Ex extinguishers are equipped with AVD Extinguishing Agent - Aqueous Vermiculite Dispersion. They are ideally suited for Lithium battery fires. AVD's enhanced fire extinguishing properties when compared to the existing products make it the only fire extinguishing agent you should consider for lithium-ion battery fires.



PRODUCT PERFORMANCES :

- Water content cools the fire source.
- Vermiculite platelets encapsulate the fuel source creating an oxygen barrier.
- The vermiculite film is not electrically conductive.
- The product can be applied as a fire break to prevent the propagation of fire.
- The product can be used on class a fires.
- The extinguisher is environmentally friendly.


SAFETY :

- Strong metal handle and not offensive.
- Manometer for instantly checking that the extinguisher is operational.

MANOEUVRABILITY - COMFORT :

- Reduced weight for easier carrying and handling.
- Facility use, fire extinguisher under pressure.
- Hose held by a magnet welded to the diffuser level.

Eurofeu offers a return service for extinguishers that reach their expiration date.
Other sizes available : 500ml aerosol and 25-50L

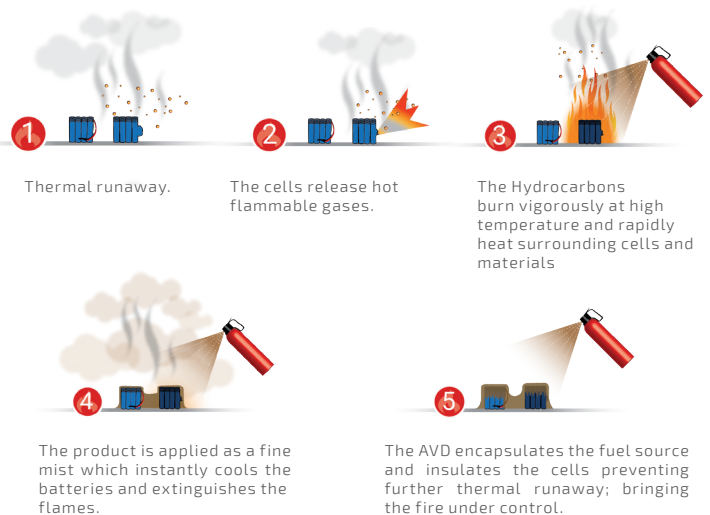

PRODUCT HIGHLIGHTS

ENVIRONMENTALLY FRIENDLY :

- ↳ Vermiculite is a naturally occurring mineral that is exempt from REACH regulations.
- ↳ It is chemically and physically inert, releasing only steam when exposed to raised temperatures.
- ↳ Non toxic to Humans, Flora and Fauna.




Non-contractual pictures.

COMPONENTS

- 1 Hose 6/9
- 2 Green base
- 3 Vanne
- 4 Manometer
- 5 Plastic seal
- 5* Other seal
- 6 Green handle
- 7 Dip tube
- 8 Filter
- 9 Nozzle O-ring
- 10 Atomiser
- 11 Wall Bracket
- 12 Safety pin
- 13 Head gasket

1L	2L	6L	9L
/	/	A010248	
/	/	A021863	
A028248	A028249	A028232	
A022609			
A001726			
A022641	A022614		
/	/	A028240	
A028233	A028235	A028236	A028239
A028231			
A028228	A028229	A028230	
A028223	A028224	A028225	
A022648	A022649	A028257	
A022652	A022631		
A028652		A028447	

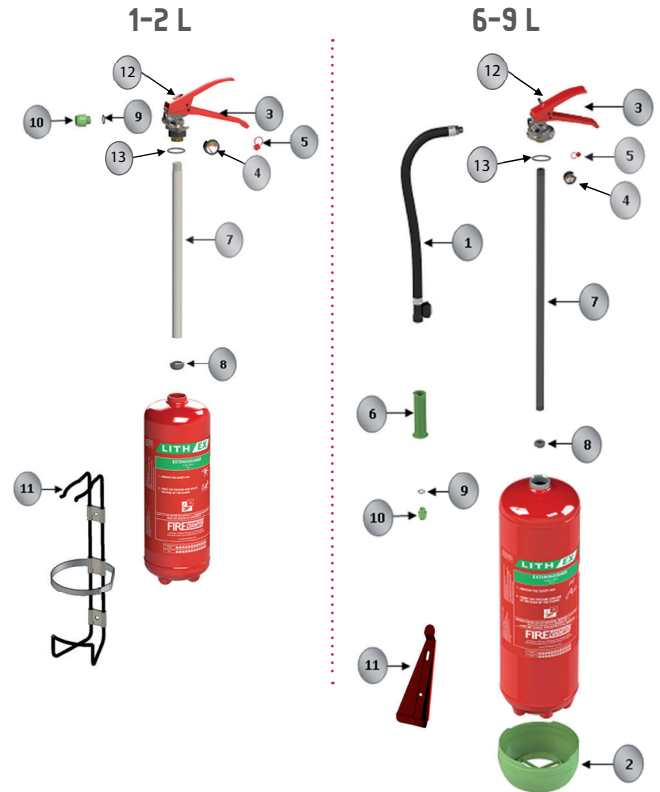

TECHNICAL SPECIFICATIONS

NOM COMMERCIAL	LITH EX 1L	LITH EX 2L	LITH EX 6L	LITH EX 9L
Certification	/	EN3-7 / NF - Kitemark n°KM 614276		
Operating weight	1L	2L	6L	9L
Extinguishing agent	AVD (Aqueous Vermiculite Dispersion)			
Fire rating	3A	5A	13A	13A
Operating weight	2.1 +/- 0.2 kg	3.9 +/- 0.3 kg	10.7 +/- 0.3 kg	15 +/- 0.3 kg
Height	320	380	522	664
Overall width	110	155	250	250
Diameter	85	110	170	170
Propellant	15 bar (Nitrogen + 3 % Helium)			
Transport bracket	Standard		Option	
Wall bracket	Standard			
Base 6/9	/		Standard * This extinguisher is designed to be attached to the wall with its proper wall bracket. On the ground, it need its suitable base.	
Operating temperature	+5°C / +60°C			
Operating time	19s	36.5s	1min47	2min52
Discharge Range	1.5 to 2m			
Packaging L x W x H	10 units 390 x 540 x 220	6 units 440 x 400 x 265	536 x 260 x 185	576 x 219 x 185
Palletisation L x W x H (quantity per pallet)	1310x1200x800 : 210 units	1460x1200x800 : 162 units	1200 x 800 x 1434 42 units	1200 x 800 x 1434 35 units

MED - MARINE APPROVED

YOUR CONTACT

**DANTE EXTINGUEURS
MARINE FIRE PROTECTION**

Tel: + 33 493 78 40 45

Mail: info@dante-extincteurs.com

Web: dante-extincteurs.com